

Sylproof LED

SYLPROOF LED 23W 1265MM S 6500K

0047892



Range Features

- 662mm, 1,265mm & 1,565mm single and twin weatherproof LED luminaires
- Reminiscent of traditional fluorescent look and feel
- Impressive performance, up to 7,270lm
- High efficiency, will help you comply with Building regulations - up to 102lm/W (on 1,265mm Single version)(luminaire lumen output on 1,565mm twin version)
- Smooth body finish - reduced dirt and dust build up, Vandal, impact and heat resistant robust polycarbonate body (IK08)
- Efficient LED Driver supplied as standard
- Instant on - zero flicker or warm up time
- UV stabilised polycarbonate body and diffuser - no yellow discoloration
- Linear prisms designed to optimise light output and to reduce glare, Interlocked stainless steel brackets
- Energy Class: A+, A, A
- Extra long life with 50,000 hours

PRODUKTÜBERSICHT

Zertifizierungen	CE
Farbtemperatur (K)	6500
Farbe	Grey
Ra	80
Dimmbar	Non-dim / not dimmable (switched only)
EAN-Code	5410288478920
Lichtstrom (lm)	2279
Gehäuse	Polycarbonate
IK-Einstufung	IK08
IP-Einstufung	IP65
Lichtfarbe	Cool White
Leuchtenbetriebswirkungsgrad (%)	100
Montage	Surface or Suspended (with accessory)
Bestellnummer	0047892
Lichtausbeute (Nennwert) (lm/W)	98.2327586206897
Durchschnittliche Lebensdauer (Nennwert) (h)	50000
Technologie	LED
Spannung (V)	220-240
Lampe enthalten	Integrated LED
Kompatibel mit Glühlampen der Energieeffizienzklasse:	A++; A+
Farbkonsistenz (SDCM)	6 Step
Lichtstrom (Not-) (lm)	N/A
Einschaltstrom (max. Menge pro 16A C Schutzschalter)	97

Sylproof LED

SYLPROOF LED 23W 1265MM S 6500K

0047892

DATENTABELLE

Allgemeine Daten

Mittlere Lebensdauer (Nennwert) (h)	50000
Zertifizierungen	CE
Betriebsgerätetyp	Electronic
Dimmbar	Non-dim / not dimmable (switched only)
EAN-Code	5410288478920
Umwelt	Internal/External
Leuchtennennwert	Closed
Allgemeiner Einsatz	Logistics and Industry
Gehäuse	Polycarbonate
Montage	Surface or Suspended (with accessory)
Bestellnummer	0047892

Lange Bezeichnung

662mm, 1,265mm & 1,565mm single and twin weatherproof LED luminaires
 Reminiscent of traditional fluorescent look and feel
 Impressive performance, up to 7,270lm
 High efficiency, will help you comply with Building regulations - up to 102lm/W (on 1,265mm Single version)(luminaire lumen output on 1,565mm twin version)
 Smooth body finish - reduced dirt and dust build up, Vandal, impact and heat resistant robust polycarbonate body (IK08)
 Efficient LED Driver supplied as standard
 Instant on - zero flicker or warm up time
 UV stabilised polycarbonate body and diffuser - no yellow discolouration
 Linear prisms designed to optimise light output and to reduce glare, Interlocked stainless steel brackets
 Energy Class: A++, A+, A
 Extra long life with 50,000 hours

Produktname	SYLPROOF LED 23W 1265MM S 6500K
Durchschnittliche Lebensdauer (Nennwert) (h)	50000
Technologie	LED
Kompatibel mit Glühlampen der Energieeffizienzklasse:	A++; A+

Sylproof LED

SYLPROOF LED 23W 1265MM S 6500K

0047892

Product features	Weather resistant LED Luminaire, 1265MM with Single Lamp, 23W at 6500K. Reminiscent of traditional T5 aesthetic look and feel with all the benefits of LED. UV stabilised polycarbonate cover with specially designed linear prismatic len - softens and control the light optimises output and avoids yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle and install. Minimal maintainence with no intregral moving components. Through wiring effortlessly achieved. IP65 and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible. As Sylproof LED. *Available from November 2015*.
-------------------------	---

Optische Daten

Farbtemperatur (K)	6500
Ra	80
Verteilungstyp	Direct
Lichtstrom (lm)	2279
Lichtfarbe	Cool White
Leuchtenbetriebswirkungsgrad (%)	100
Farbkonsistenz (SDCM)	6 Step
Lichtstrom (Not-) (lm)	N/A

Physikalische Daten

Farbe	Grey
Diffusoroberfläche	Clear
Diffusormaterial	Polycarbonate
Notlichtlaufzeit (h)	N/A
Notlichtmodus	N/A
Höhe (mm)	91
IK-Einstufung	IK08
IP-Einstufung	IP65
Inklusive Lampe	Integrated
Länge (mm)	1265
Reflektoroberfläche	Polycarbonate Diffuser
Gewicht (kg)	1.79
Breite (mm)	83
Lampe enthalten	Integrated LED


Elektrische Daten

Treiberstrom (mA)	300
Elektrische Schutzklassen	CLASS I
Glühdrahttest	850°C
Lichtausbeute (Nennwert) (lm/W)	98.2327586206897
Ta-Nennwert	-30°C to +30°C
Leistungsaufnahme gesamt (W)	23.2


Sylproof LED SYLPROOF LED 23W 1265MM S 6500K 0047892

Spannung (V)	220-240
Einschaltstrom (max. Menge pro 16A C Schutzschalter)	97

PHOTOMETRIE

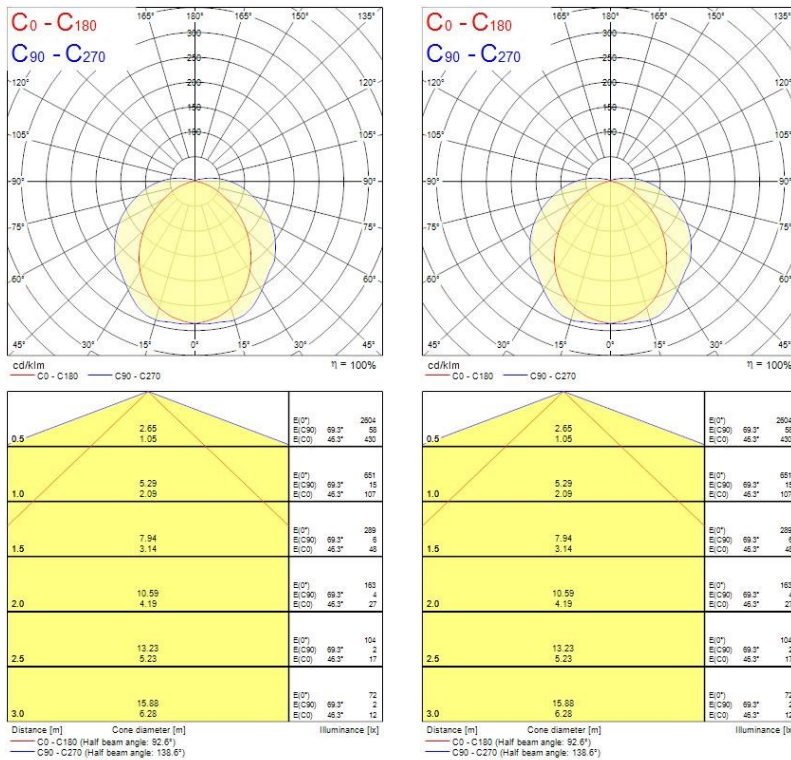

TECHNISCHE ZEICHNUNGEN





Sylproof LED

SYLPROOF LED 23W 1265MM S 6500K


0047892


SYLVANIA 0047892


 Diese Leuchte enthält eingebaute LED-Lampen.


} **LED**


Die Lampen können in der Leuchte nicht ausgetauscht werden.





874/2012 

 Diese Leuchte enthält eingebaute LED-Lampen.

Die Lampen können in der Leuchte nicht ausgetauscht werden.


} **LED**



SYLVANIA 0047892  874/2012